


CERTIFICATE

Certified Passive House Component

Component-ID 1073wi04 valid until 31st December 2020

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

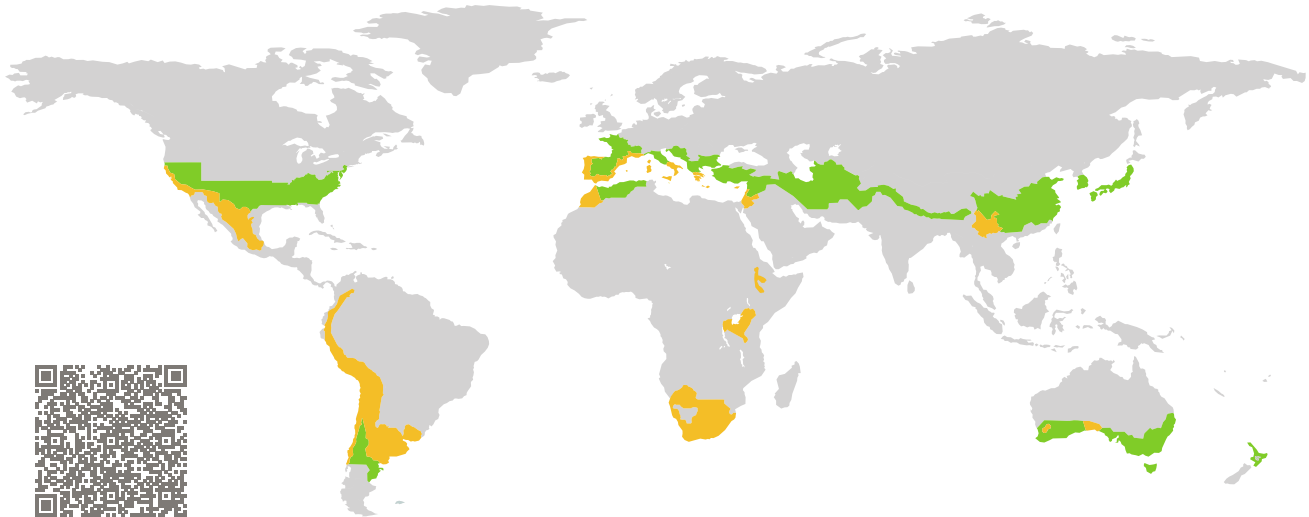


Category: **Window Frame**
Manufacturer: **SIP Productos Industriales S.A.,
Rabade (Lugo),
Spain**
Product name: **Bruegmann bluEvolution: 82 MD**

**This certificate was awarded based on the following
criteria for the warm, temperate climate zone**

Comfort $U_W = 1.00 \leq 1.00 \text{ W}/(\text{m}^2 \text{ K})$
 $U_{W,\text{installed}} \leq 1.05 \text{ W}/(\text{m}^2 \text{ K})$
with $U_g = 0.90 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.65$

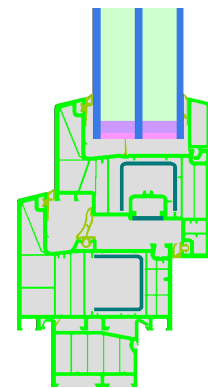

Passive House
efficiency class

phE

phD

phC

phB


phA

warm, temperate climate




**CERTIFIED
COMPONENT**

Passive House Institute

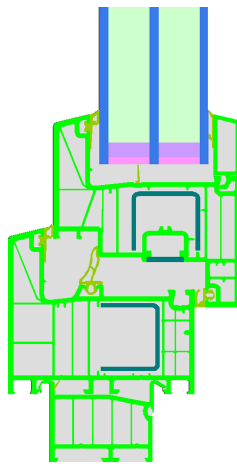

Calculation model

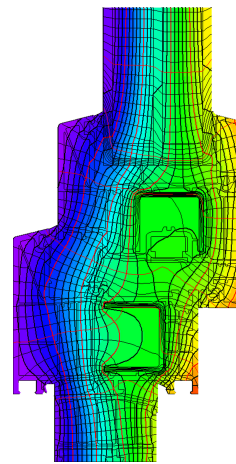

Isothermal

Description

Construction: PVC-windowframe with steel reinforcements inside the sash and blind-frame. Pane thickness: 48 mm (4/18/4/18/4), rebate depth: 23 mm, spacer: SWISSPACER Ultimate

Explanation




The window U-values were calculated for the test window size of 1.23 m × 1.48 m with $U_g = 0.90 \text{ W}/(\text{m}^2 \text{ K})$. If a higher quality glazing is used, the window U-values will improve as follows:

Glazing	$U_g =$	0.90	0.70	0.64	0.58	$\text{W}/(\text{m}^2 \text{ K})$
		↓	↓	↓	↓	
Window	$U_W =$	1.00	0.87	0.84	0.80	$\text{W}/(\text{m}^2 \text{ K})$




Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

Frame values			Frame width b_f mm	U -value frame U_f W/(m ² K)	Ψ -panel edge Ψ_g W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Top	(to)		123	1.00	0.023	0.70
Side	(s)		123	1.00	0.023	0.70
Bottom	(bo)		153	1.14	0.024	0.68
Mullion flying	(fm)		180	1.00	0.023	0.72
Spacer: SWISSPACER Ultimate			Secondary seal: Polysulfid			

Validated installations

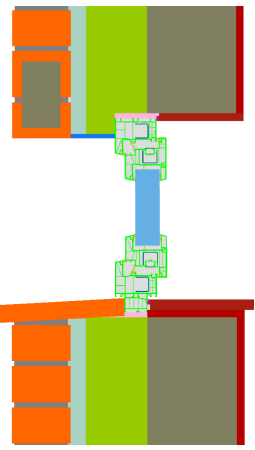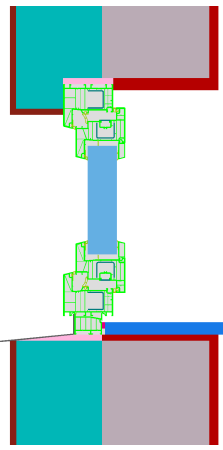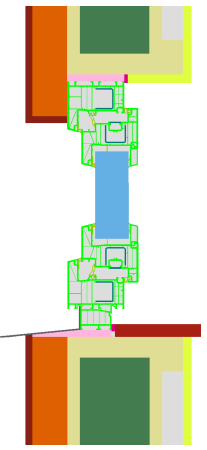Cavity wall		EIFS		Timber frame	
$U_{Wall} = 0.24 \text{ W/(m}^2 \text{ K)}$		$U_{Wall} = 0.23 \text{ W/(m}^2 \text{ K)}$		$U_{Wall} = 0.24 \text{ W/(m}^2 \text{ K)}$	
					
$\Psi_{install}$	W/(m K)	$\Psi_{install}$	W/(m K)	$\Psi_{install}$	W/(m K)
Top	0.005	Top	0.002	Top	0.007
Side	0.005	Side	0.002	Side	0.007
Bottom	0.021	Bottom	0.026	Bottom	0.034
$U_{W,installed} = 1.03 \text{ W/(m}^2 \text{ K)}$		$U_{W,installed} = 1.03 \text{ W/(m}^2 \text{ K)}$		$U_{W,installed} = 1.04 \text{ W/(m}^2 \text{ K)}$	

